Ficha técnica

Lo que un arquitecto necesita para meterlo en su cuadro de acabados.

ANCHO DE ROLLO	1.22 m
LARGO DE ROLLO	50.00 m
RENDIMIENTO POR ROLLO	61.00 m²
UNIDAD DE VENTA	Metro lineal
PRECIO POR METRO LINEAL	S/ 88.50 con IGV
SERIES DISPONIBLES	Wood · Look Lino
PEDIDO	1 rollo (50 ml) · 20 días hábiles
PROPIEDADES	Impermeable · Ignífugo · Antihongos
VIDA ÚTIL	Más de 20 años (fabricante)
CERTIFICADOS	Ficha del fabricante a pedido

IMPERMEABLE

Va en cocina y baño, incluido el frente bajo el lavadero.

IGNÍFUGO

Apto para especificar en oficinas, hoteles y áreas comunes.

ANTIHONGOS

Pensado para la humedad de Lima.

MÁS DE 20 AÑOS

Vida útil declarada por el fabricante.

Se aplica directamente sobre lo que ya existe: paredes, muebles, puertas y closets, sin demolición ni polvo, en uno o dos días.

CONTACTO
+51 972 136 429

INSTAGRAM
@decohome___studio

WEB
decohome.pe

Seguridad y medio ambiente

CALIDAD DEL AIRE INTERIOR

La lámina de PVC, el adhesivo y el papel soporte cumplen los estándares ambientales exigidos a oficinas públicas, colegios, guarderías, asilos y espacios comerciales.

METALES PESADOS · CD, PB, HG	2 mg/kg	No detectado
METALES PESADOS · CR (VI)	8 mg/kg	No detectado
FORMALDEHÍDO · HCHO	0.05 mg/kg	No detectado
FTALATOS · DBP, BBP, DEHP, DIBP	50 mg/kg	No detectado

SEGURIDAD EN PRODUCTOS INFANTILES

Los mismos materiales cumplen los límites de sustancias nocivas de las normas de productos para niños.

SUSTANCIAS PELIGROSAS · SB, AS	2 mg/kg	No detectado
SUSTANCIAS PELIGROSAS · SE	5 mg/kg	No detectado
RETARDANTES DE LLAMA · PBB, PBDE	1000 mg/kg	No detectado

REACCIÓN AL FUEGO

Ensayado según EN 13823:2020+A1:2022 y EN ISO 11925-2:2020, sobre placa de silicato de calcio.

FIGRA 0,2 MJ	58.8 W/s
LFS < BORDE DE LA PROBETA	Sí
THR 600 S	1.0 MJ
SMOGRA	18.5 m²/s²
TSP 600 S	32.5 m²
PARTÍCULAS O GOTAS INFLAMADAS EN 600 S	No
FS ≤ 150 MM EN 60 S · EXPOSICIÓN 30 S	Sí

Clase B-s1, d0

El material y sus ensayos

RESISTENCIA A MANCHAS

Se limpian bebidas, comida y tinta. La tinta de plumón sale con detergente neutro en las series AH301-AH307, AH501-AH508 y NF001-NF008.

ESTRUCTURA DEL PRODUCTO

FILM PROTECTOR	FILM IMPRESO	LÁMINA BASE	CAPA ADHESIVA	PAPEL LIBERADOR
La cara que se retira al terminar	El dibujo y el color	El cuerpo del vinilo	Sensible a la presión	Marcas cada 1 y 10 cm

INFORMES DE ENSAYO

Ensayos del material, emitidos por SGS a nombre del fabricante. Copias completas a pedido.

ROHS 2.0

Directiva UE 2015/863, que enmienda el anexo II de la 2011/65/UE. Cadmio, plomo, mercurio, cromo hexavalente, PBB, PBDE y los ftalatos DEHP, BBP, DBP y DIBP: ninguno detectado.

SGS N° SHAIN23021037401 · 21 de diciembre de 2023

SIN FORMALDEHÍDO

ISO 14184-1:2011, análisis por UV-Vis. Formaldehído: no detectado.

SGS N° SHAIN23019624403 · 30 de noviembre de 2023

REACCIÓN AL FUEGO

Clasificación según EN 13501-1:2018, con los ensayos EN 13823:2020+A1:2022 y EN ISO 11925-2:2020. Probetas de 1500 × 1000 mm y 1500 × 495 mm adheridas a placa de silicato de calcio. Resultado: clase B-s1, d0.

SGS · 30 de enero de 2024

LO QUE ESTOS ENSAYOS NO CUBREN

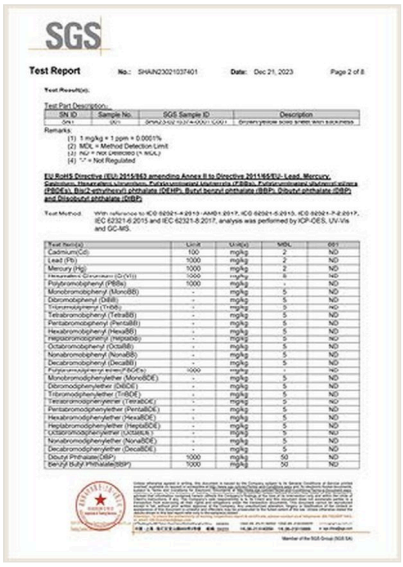
Miden el material, no la obra. El resultado de cada instalación depende del estado de la superficie: eso se revisa con nuestra hoja de control de calidad antes de empezar.

Deco Home Studio

Los informes, página por página

Las páginas de los informes tal como las publica el fabricante. Se ven completas y en alta a pedido.

ROHS 2.0


SGS

Test Report No.: SHAN23021037401 Date: Dec 21, 2023 Page 2 of 8

Test Part Description:-

SN ID	Sample No.	SGS Sample ID	Description
SN1	001	SHAN23021037401.0001	Brown/yellow solid sheet with thickness

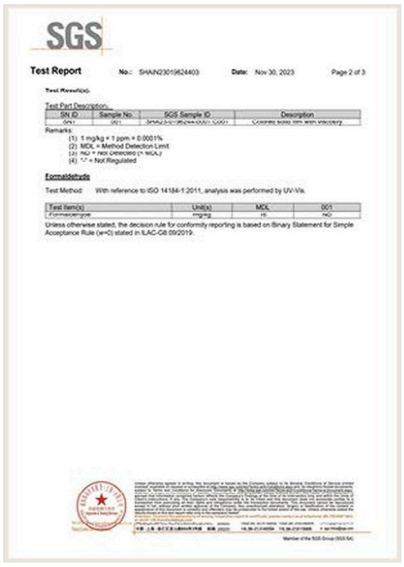
Remarks:
(1) 1 mg/kg = 1 ppm = 0.0001%
(2) MDL = Method Detection Limit
(3) ND = Not Detected (< MDL)
(4) "-" = Not Regulated

EU RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU-Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs), Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) and Diisobutyl phthalate (DIBP)

Test Method: With reference to IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analysis was performed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Unit	Unit(s)	MDL	001
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1000	mg/kg	2	ND
Mercury (Hg)	1000	mg/kg	2	ND
Hexavalent Chromium (Cr(VI))	1000	mg/kg	8	ND
Polybrominated Biphenyls (PBBs)	1000	mg/kg	-	ND
Monobromobiphenyl (MonoBB)	-	mg/kg	5	ND
Dibromobiphenyl (DiBB)	-	mg/kg	5	ND
Tribromobiphenyl (TriBB)	-	mg/kg	5	ND
Tetrabromobiphenyl (TetraBB)	-	mg/kg	5	ND
Pentabromobiphenyl (PentaBB)	-	mg/kg	5	ND
Hexabromobiphenyl (HexaBB)	-	mg/kg	5	ND
Heptabromobiphenyl (HeptaBB)	-	mg/kg	5	ND
Octabromobiphenyl (OctaBB)	-	mg/kg	5	ND
Nonabromobiphenyl (NonaBB)	-	mg/kg	5	ND
Decabromobiphenyl (DecaBB)	-	mg/kg	5	ND
Polybrominated diphenyl ethers (PBDEs)	1000	mg/kg	-	ND
Monobromodiphenylether (MonoBDE)	-	mg/kg	5	ND
Dibromodiphenylether (DiBDE)	-	mg/kg	5	ND
Tribromodiphenylether (TriBDE)	-	mg/kg	5	ND
Tetrabromodiphenylether (TetraBDE)	-	mg/kg	5	ND
Pentabromodiphenylether (PentaBDE)	-	mg/kg	5	ND
Hexabromodiphenylether (HexaBDE)	-	mg/kg	5	ND
Heptabromodiphenylether (HeptaBDE)	-	mg/kg	5	ND
Octabromodiphenylether (OctaBDE)	-	mg/kg	5	ND
Nonabromodiphenylether (NonaBDE)	-	mg/kg	5	ND
Decabromodiphenylether (DecaBDE)	-	mg/kg	5	ND
Dibutyl Phthalate (DBP)	1000	mg/kg	50	ND
Benzyl Butyl Phthalate (BBP)	1000	mg/kg	50	ND

SIN FORMALDEHÍDO


SGS

Test Report No.: SHAN23019624403 Date: Nov 30, 2023 Page 2 of 3

Test Part Description:-

SN ID	Sample No.	SGS Sample ID	Description
SN1	001	SHAN23019624403.0001	Colorless solid film with thickness

Remarks:
(1) 1 mg/kg = 1 ppm = 0.0001%
(2) MDL = Method Detection Limit
(3) ND = Not Detected (< MDL)
(4) "-" = Not Regulated

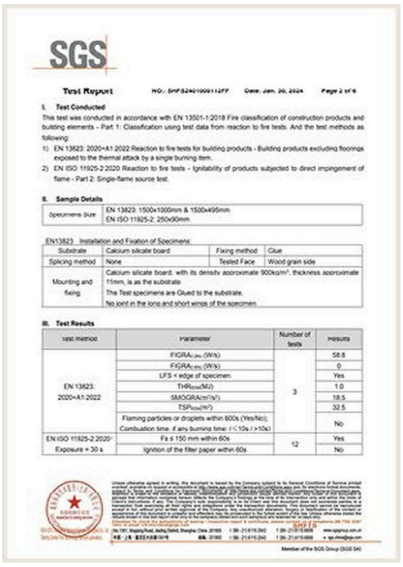
Formaldehyde

Test Method: With reference to ISO 14184-1:2011, analysis was performed by UV-Vis.

Test Item(s)	Unit(s)	MDL	001
Formaldehyde	mg/kg	75	ND

Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule (w=0) stated in ILAC-G8:09/2019.

REACCIÓN AL FUEGO


SGS

Test Report NO.: SHF24010001 1FF Date: Jan. 30, 2024 Page 2 of 6

I. Test Conducted

This test was conducted in accordance with EN 13501-1:2018 Fire classification of construction products and building elements - Part 1: Classification using test data from reaction to fire tests. And the test methods as following:

1) EN 13823: 2020+A1:2022 Reaction to fire tests for building products - Building products excluding floorings exposed to the thermal attack by a single burning item.
2) EN ISO 11925-2:2020 Reaction to fire tests - Ignitability of products subjected to direct impingement of flame - Part 2: Single-flame source test.

II. Sample Details

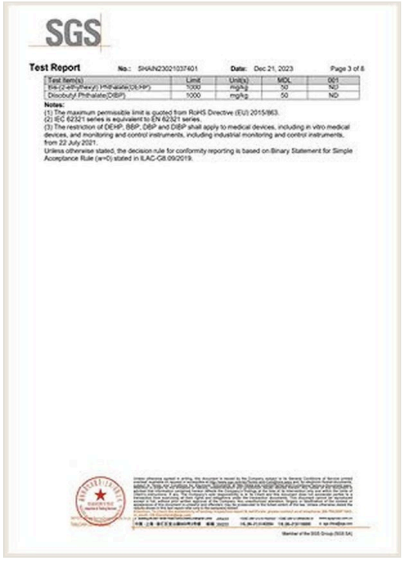
Specimens Size	EN 13823: 1500×1000mm & 1500×495mm EN ISO 11925-2: 250×90mm

EN13823 Installation and Fixation of Specimens:

Substrate	Calcium silicate board	Fixing method	Glue
Splicing method	None	Tested Face	Wood grain side
Mounting and fixing	Calcium silicate board: with its density approximate 900kg/m³, thickness approximate 11mm, is as the substrate. The Test specimens are Glued to the substrate. No joint in the long and short wings of the specimen.		

III. Test Results

Test method	Parameter	Number of tests	Results
EN 13823: 2020+A1:2022	$FIGRA_{0.4MJ}$ (W/s)	3	58.8
	$FIGRA_{0.4MJ}$ (W/s)		0
	LFS < edge of specimen		Yes
	THR_{600s}(MJ)		1.0
	SMOGRA(m²/s²)		18.5
	TSP_{600s}(m²)		32.5
	Flaming particles or droplets within 600s (Yes/No); Combustion time, if any burning time: t<10s / >10s)		No
EN ISO 11925-2:2020 Exposure = 30 s	Fs ≤ 150 mm within 60s	12	Yes
	Ignition of the filter paper within 60s		No


SGS

Test Report No.: SHAN23021037401 Date: Dec 21, 2023 Page 3 of 8

Test Item(s)	Limit	Unit(s)	MDL	001
Bis(2-ethylhexyl) Phthalate (DEHP)	1000	mg/kg	50	ND
Diisobutyl Phthalate (DIBP)	1000	mg/kg	50	ND

Notes:
(1) The maximum permissible limit is quoted from RoHS Directive (EU) 2015/863.
(2) IEC 62321 series is equivalent to EN 62321 series.
(3) The restriction of DEHP, BBP, DBP and DIBP shall apply to medical devices, including in vitro medical devices, and monitoring and control instruments, including industrial monitoring and control instruments, from 22 July 2021.
Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule (w=0) stated in ILAC-G8:09/2019.

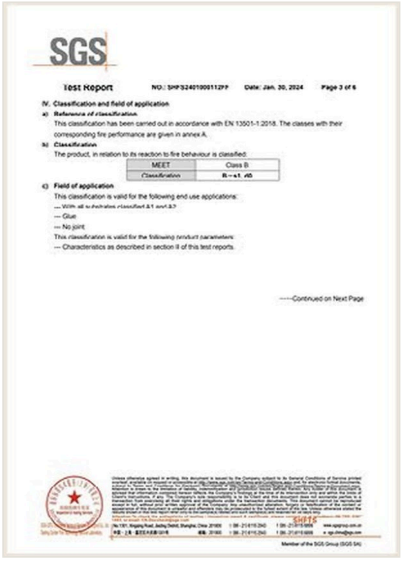

SGS

Test Report No.: SHAN23019624403 Date: Nov 30, 2023 Page 3 of 3

Sample Photo:

SHAN23-019624-0001-C001

SGS authenticate the photo on original report only
*** End of Report ***


SGS

Test Report NO.: SHF24010001 1FF Date: Jan. 30, 2024 Page 3 of 6

IV. Classification and field of application

a) Reference of classification.
This classification has been carried out in accordance with EN 13501-1:2018. The classes with their corresponding fire performance are given in annex A.

b) Classification
The product, in relation to its reaction to fire behaviour is classified:

MEET	Class B
Classification	B-s1, d0

c) Field of application
This classification is valid for the following end use applications:
— Glue
— No joint
This classification is valid for the following product parameters:
— Characteristics as described in section II of this test reports.

-----Continued on Next Page